

A60

IMO

SPECIFICATIONS

Frame	14 GA. Cold Rolled Steel
Door	14 GA. 3 1/8" thick ASTM A1008 / A1008M
Paint	Prime painted
Hinges	Stainless Steel Lift-Off
Insulation	Fire Rated Marine
Lock	Mortised Lock (3-Point)

OPTIONS

Door Types Frame	F & V
Type	Z, Zg, F2, F3, F5 & F6
Paint	Baked Enamel / Powder Coat
Galvannealed Steel	ASTM A653 / A653M
Stainless Steel Finish	Matte
Vision Panel	10" x 10" Contraflam
Lock	3-Point Mortise Exit Device
Customizations	Size, Feature, Weather-tight and Fume-tight Applications



CERTIFICATIONS

U.S.C.G. #164.136/122/0
U.S.C.G. #164.136/123/0


DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204

P 800.825.8271
F 210.226.0913
www.DeanSteel.com




MADE IN AMERICA
AND VETERAN OWNED


Door Types

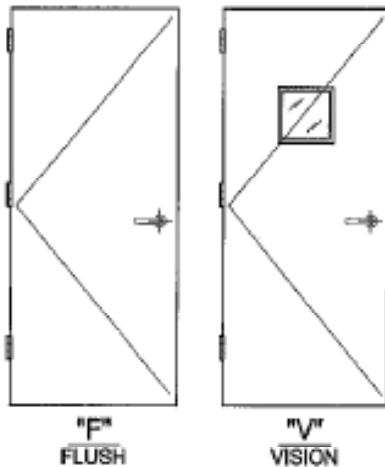


Frame Elevations

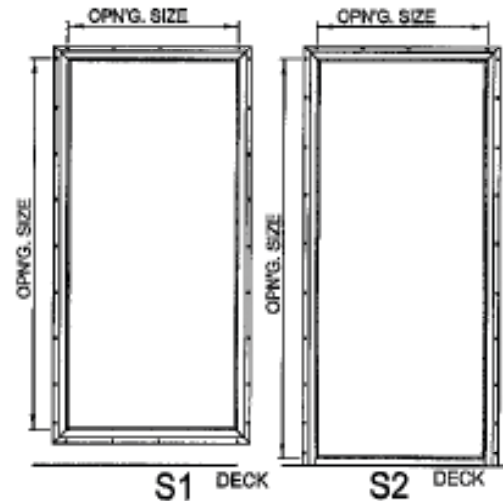

Frame Types

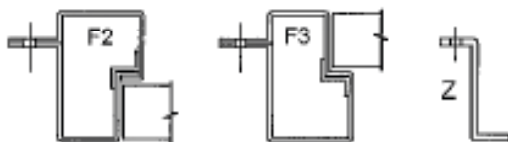

FLANGE MOUNTED FRAMES

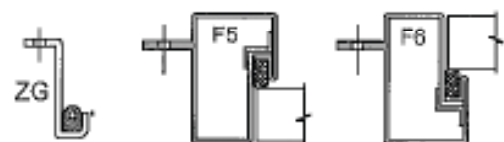

Flange Mounted Integral Gasket Frames
(for Fume tight & Weather tight)

DOOR HANDING CHART				NOTE : ALWAYS USE THE KEY SIDE OF THE DOOR FOR REFERENCE	
SINGLE DOORS		PAIR of DOORS			
INSIDE RIGHT HAND RH	INSIDE LEFT HAND LH	INSIDE RIGHT HAND ACTIVE LH ASTRAGAL RH ACT	INSIDE LEFT HAND ACTIVE RH ASTRAGAL LH ACT		
INSIDE RIGHT HAND REVERSE RHR	INSIDE LEFT HAND REVERSE LHR	INSIDE RIGHT HAND REVERSE ACTIVE RH ASTRAGAL RHR ACT	INSIDE LEFT HAND REVERSE ACTIVE LH ASTRAGAL LHR ACT		