

# A60 Pair | IMO

## SPECIFICATIONS

---

<b>Frame</b>	14 GA. Stainless Steel 316L (ASTM A240/A240M)
<b>Door</b>	14 GA. 3-1/8" Thick Stainless Steel 316L (ASTM A240/A240M)
<b>Paint</b>	Prime painted
<b>Hinges</b>	Stainless Steel Lift-Off
<b>Insulation</b>	Fire-Rated Marine
<b>Lock</b>	Mortised Lock (3-Point)

## OPTIONS

---

<b>Door Types</b>	F and V (Active Leaf) F (Inactive Leaf)
<b>Frame Types</b>	Z, ZG, F2, F3, F5, F6
<b>Paint</b>	Baked Enamel/Powder Coat
<b>Stainless Steel Finish</b>	Matte
<b>Vision Panel</b>	Contraflam 10" x 10"
<b>Lock</b>	3 Point Mortise Panic Device
<b>Customizations</b>	Size and Weather-tight Applications
<b>Sizes (up to)</b>	84"W x 90"H Scheduled Opening 80"W x 103 1/2"H (Tallest) 96 1/2"W x 86 1/2"H (Widest)



## CERTIFICATIONS

---

**IMO / FTP**  
**U.S.C.G. #164.136/126/0**


DeanSteel Manufacturing Company  
931 S. Flores Street  
San Antonio, TX 78204

P 800.825.8271  
F 210.226.0913  
www.DeanSteel.com




**MADE IN AMERICA  
AND VETERAN OWNED**

## Door Types

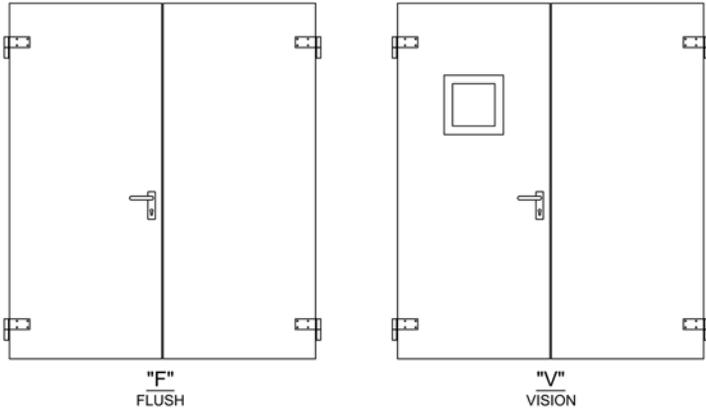


## Frame Elevations

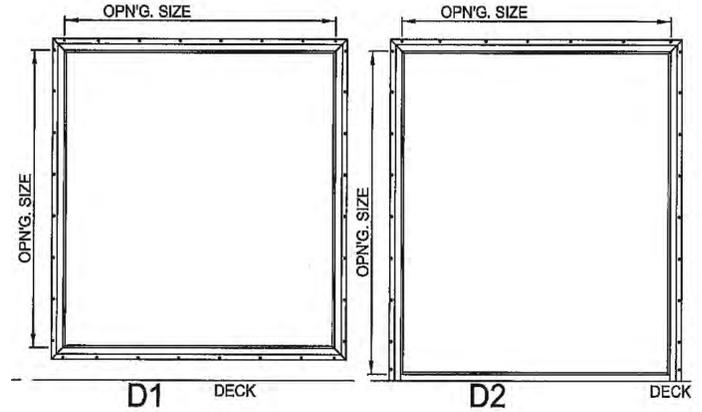


## Frame Types

### Flange Mounted Frames

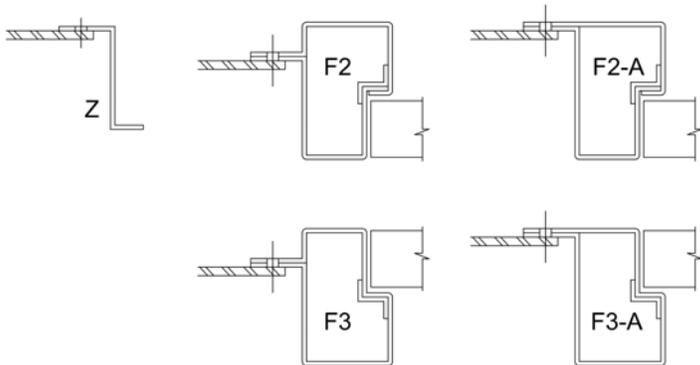

### Flange Mounted Integral Gasket Frames (for Fumetight & Weathertight)

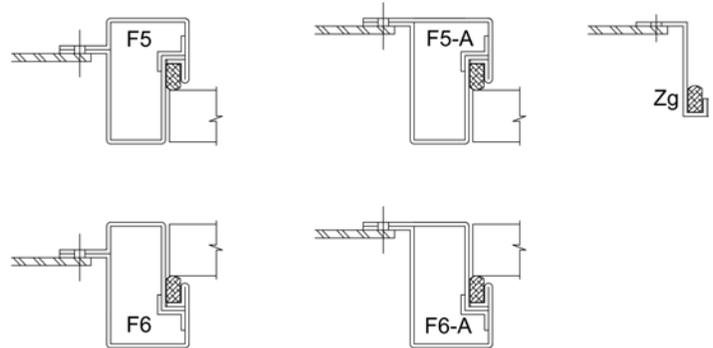

DOOR HANDING CHART			
PAIR of DOORS			
F2 or F5 IN SWING ONLY INSIDE		F2 or F5 IN SWING ONLY INSIDE	
RIGHT HAND ACTIVE RH ACT	LEFT HAND ACTIVE LH ACT	RIGHT HAND REVERSE ACTIVE RHR ACT	LEFT HAND REVERSE ACTIVE LHR ACT
F3 or F6 OUT SWING ONLY INSIDE		F3 or F6 OUT SWING ONLY INSIDE	
RIGHT HAND REVERSE ACTIVE RHR ACT	LEFT HAND REVERSE ACTIVE LHR ACT	RIGHT HAND REVERSE ACTIVE RHR ACT	LEFT HAND REVERSE ACTIVE LHR ACT
NOTE : ALWAYS USE THE KEY SIDE OF THE DOOR FOR REFERENCE			