

A60 Sliding Door | 46-CFR

SPECIFICATIONS

Operation	Manual-Adjustable Overhead Guide Roller Track/ Bottom Roller on Continuous Rail
Frame	Custom (Based on Wall Conditions)
Door	16GA. 1 3/4-in thick (Cold-rolled Steel)
Paint	Prime painted
Insulation	Marine Mineral Wool
Lock	Deadlock w/Hook Bolt (Keyed Cylinder and/or Thumb Turn)

OPTIONS


Operation	Electric-Overhead Automatic Sliding Drive System
Door Types	F; V; RV; HP
Paint	Baked Enamel
Stainless Steel	Type 316L ASTM A240 / A240M
Galvanized Steel	ASTM A653/A653M-A60
Vision Panel	Keralite Laminated Fire-Rated Glazing
Bullet Resistant	UL-752 Level 1 – 3, 6 NIJ 0108.01 Level I, II, II-A, III-A ASTM F1233 HG1, 2, 3, 4, SMG

CERTIFICATIONS

46 CFR 72.05-25
46 CFR 116.435
NVIC 9-97, CH-1



Door Types

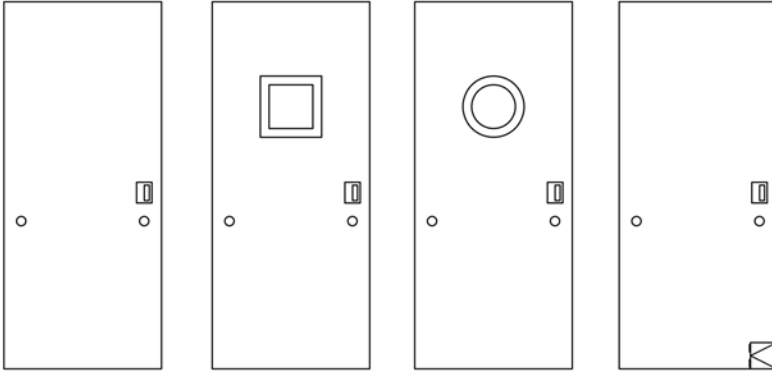


"F"
FLUSH

"V"
VISION

"RV"
ROUND VISION

"HP"
HOSE PORT

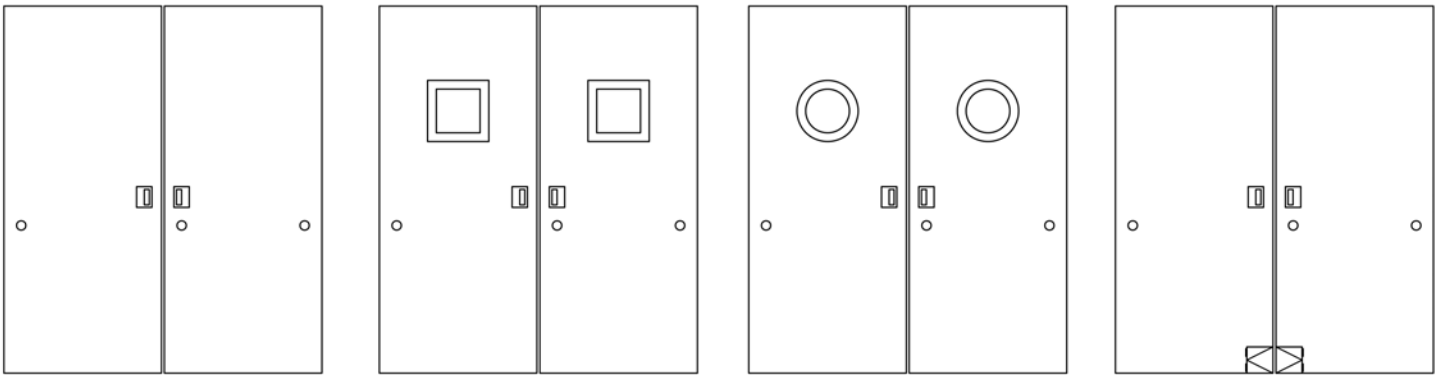

"F"
FLUSH

"V"
VISION

"RV"
ROUND VISION

"HP"
HOSE PORT