

# B15

IMO

### SPECIFICATIONS

<b>Frame</b>	16GA. Cold-rolled steel
<b>Door</b>	18GA. 1 3/4-in thick
<b>Paint</b>	Prime painted
<b>Hinges</b>	Stainless Steel Sealed Ball-bearings
<b>Insulation</b>	Marine Mineral Wool
<b>Lock</b>	Cylindrical Lock Grade 2

### OPTIONS

<b>Door Types</b>	F; L; N; V; VL; NKOL; VKO
<b>Frame</b>	14GA.
<b>Paint</b>	Baked Enamel
<b>Stainless Steel</b>	Type 316L ASTM A240 / A240M
<b>Galvanized Steel</b>	ASTM A653/A653M-A60
<b>Vision Panel</b>	Contraflam
<b>Hinge</b>	Stainless Steel Continuous Pin and Barrel w/SS Bearings
<b>Lock</b>	Mortised Lock Stainless Steel Panic Device
<b>Customizations</b>	Size, Hardware, Features, and Weather-tight Applications
<b>Louver</b>	Stainless Steel 300 sq. CM Free Air



### CERTIFICATIONS

IMO / FTP  
 U.S.C.G. #164.136/9/1  
 U.S.C.G. #164.136/130/0  
 ABS #11-HS793900A-PDA


DeanSteel Manufacturing Company  
 931 S. Flores Street  
 San Antonio, TX 78204

P 800.825.8271  
 F 210.226.0913  
[www.DeanSteel.com](http://www.DeanSteel.com)




MADE IN AMERICA  
 AND VETERAN OWNED


## Door Types

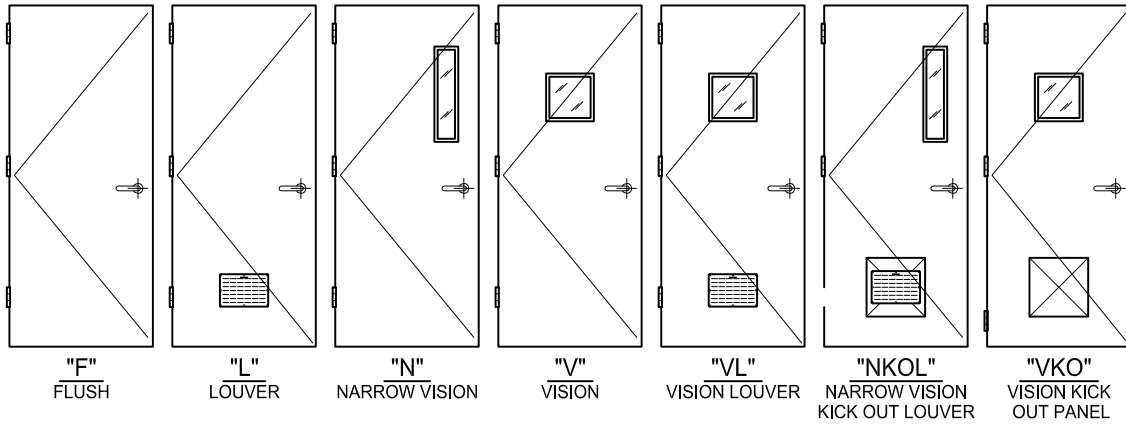

## Frame Elevations

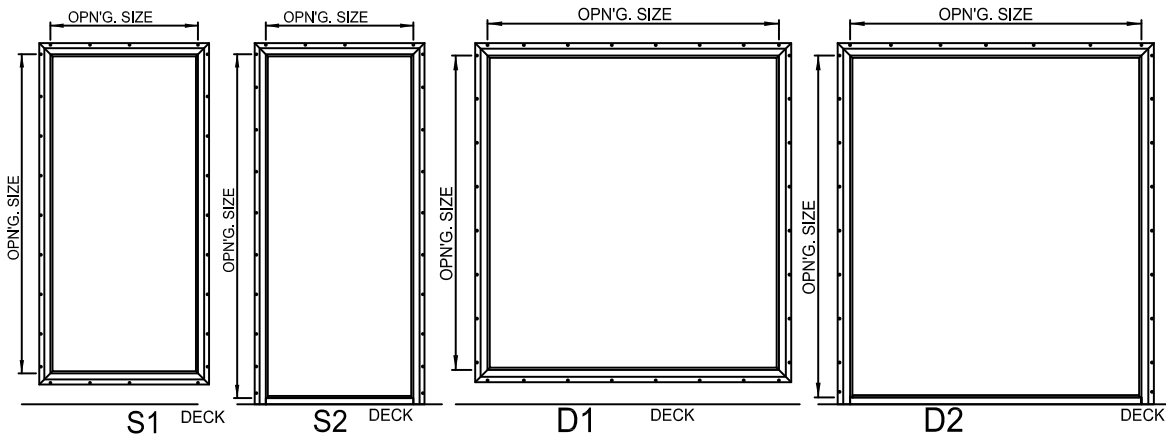

## Frame Types

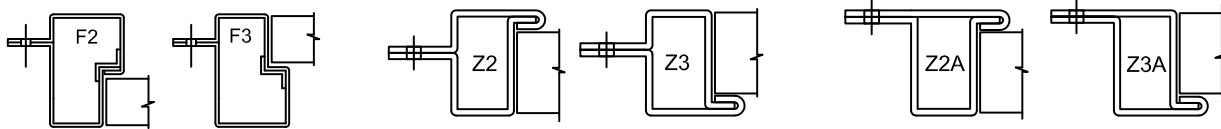

FLANGE MOUNTED FRAMES

SINGLE DOORS				PAIR of DOORS			
INSIDE F2 or Z2 IN SWING ONLY				INSIDE F2 or Z2 IN SWING ONLY			
 RIGHT HAND RH		 LEFT HAND LH		 RIGHT HAND ACTIVE RH ACT		 LEFT HAND ACTIVE LH ACT	
INSIDE F3 or Z3 OUT SWING ONLY				INSIDE F3 or Z3 OUT SWING ONLY			
 RIGHT HAND REVERSE RHR		 LEFT HAND REVERSE LHR		 RIGHT HAND REVERSE ACTIVE RH ASTRAGAL RHR ACT		 LEFT HAND REVERSE ACTIVE LH ASTRAGAL LHR ACT	

NOTE: ALWAYS USE THE KEY SIDE OF THE DOOR FOR REFERENCE