

**HURRICANE
RESISTANT**TDI Door up to 130 MPH
and Impact Resistant**SPECIFICATIONS**

Door	Maximum Size 4'0" X 8'0" (single); 8'0" X 8'0" (pair) 16 GA. or 18 GA Cold-rolled steel
Frame	16 GA. Cold-rolled steel; Welded 5 3/4" Jamb Depth (Std)
Paint	Prime Painted
Hinges	4 1/2" Standard Weight Stanley Hinges (Required on Pair)
Exit Device	Stanley Precision 2100 Apex Rim Exit Device
Anchors	Wire Anchor
Mullion	Stanley HCKR822 Keyed and Hurricane Rated Removable Mullion

OPTIONS*

Door Types	F — Flush and G — Glazed Doors
Frames	Jamb Depths from 4 3/4" to 8 3/4"
Stainless Steel	Type 316L or Type 304 ASTM A240 / A240M
Galvanized Steel	ASTM A653 / A653M — A60
Anchors	Punch and Dimple (Existing Wall Anchors), UNA, or Weld-In frame to a Steel Substructure

* Some options are mutually exclusive

**INDEPENDENT VERIFICATION
AND QUALIFICATION TESTING**

Texas Department of Insurance
TDI DR-833

National Certified Testing Laboratories
ASTM E330-14
ASTM E1886-05
ASTM E1996-09




DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204

P 800.825.8271
F 210.226.0913
www.DeanSteel.com




**MADE IN AMERICA
AND VETERAN OWNED**

Door Types

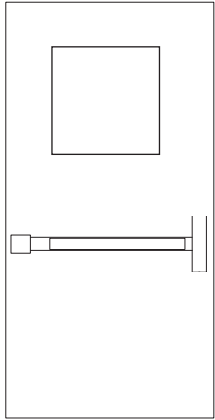

G

HALF LITE
WITH RIM EXIT DEVICE

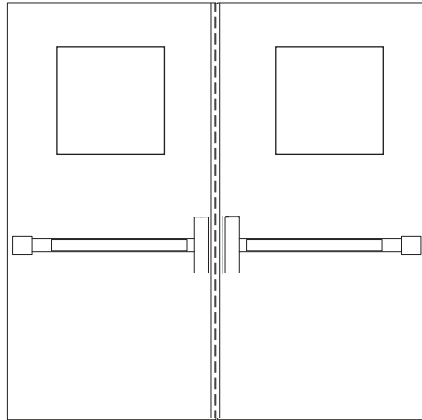


PAIR

WITH RIM EXIT DEVICES
AND REMOVABLE MULLION




RIM EXIT DEVICES SHOWN

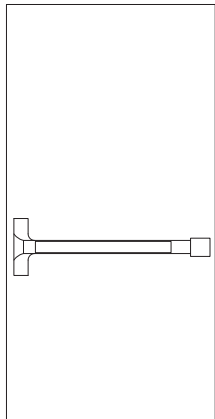

E

FLUSH
WITH RIM EXIT DEVICE

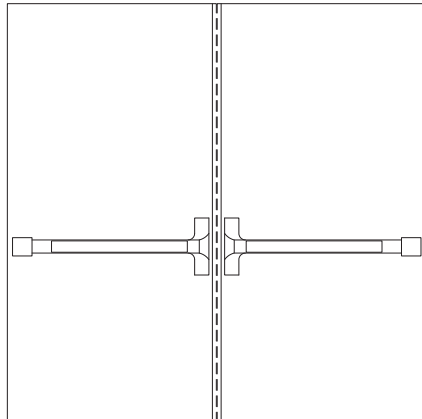

PAIR

WITH RIM EXIT DEVICES
AND REMOVABLE MULLION

DOOR HANDING CHART

NOTE :
ALWAYS USE THE KEY SIDE
OF THE DOOR FOR REFERENCE

SINGLE DOORS

PAIR OF DOORS

<p>INSIDE</p> <p>RIGHT HAND RH</p>	<p>INSIDE</p> <p>LEFT HAND LH</p>	<p>INSIDE</p> <p>RIGHT HAND ACTIVE RH ACT</p>	<p>INSIDE</p> <p>LEFT HAND ACTIVE LH ACT</p>
<p>INSIDE</p> <p>RIGHT HAND REVERSE RHR</p>	<p>INSIDE</p> <p>LEFT HAND REVERSE LHR</p>	<p>INSIDE</p> <p>RIGHT HAND REVERSE ACTIVE RHR ACT</p>	<p>INSIDE</p> <p>LEFT HAND REVERSE ACTIVE LHR ACT</p>