

Weathertight Pilot Barge Door

SPECIFICATIONS

Material	Type 304-SS ASTM A240/A240M
Frame	16GA. Flanged 4-Sided "S1" Frame Elevation with F3-Open Profile
Door	16GA. 1 3/4-in. thick
Vision Panel	"GR" Door Type with Tempered Glass
Finish	Matte
Insulation	Marine Mineral Wool
Hinges	4-1/2"x4-1/2" Stainless Steel Sealed Ball-bearings
Lock	Single-Point Mortise Lock
Weathertight System	Adjustable Surface-Applied Gasket (1/4" Adjustment) Drip Cap at Frame Head Door Bottom with Integrated Drip Ledge

OPTIONS

Material	Type 316L-SS ASTM A240 / A240M
Frame	14GA Flanged 3-Sided "S2" Frame Elevation with B-Sill F3-Closed Frame with Insert Plate D3 Frame for Secondary Screen Door
Door Types	GR2 - Full Glass with 2 Panes
Hinge	Stainless Steel Continuous Pin and Barrel Hinge
Vision Panel	Square Corner Window with Steel Trim for CFR-46 Fire Rating
Screen Door	1 3/8-in. Stainless Steel Screen Door Installed in Secondary Rabbet with Aluminum Screen & Single-Point Mortise Lock
Dogs	Stainless Steel Dogs with surface applied wedge





DeanSteel Manufacturing Company
931 S. Flores Street
San Antonio, TX 78204

P 800.825.8271
F 210.226.0913
www.DeanSteel.com




MADE IN AMERICA
AND VETERAN OWNED





Door Types

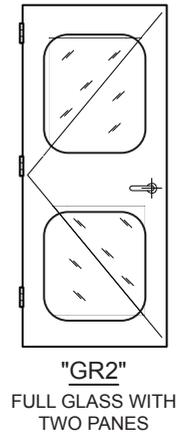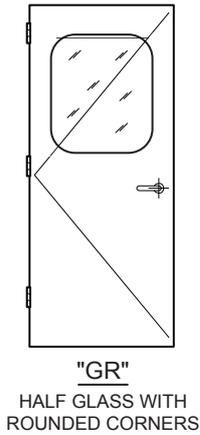


Frame Elevations

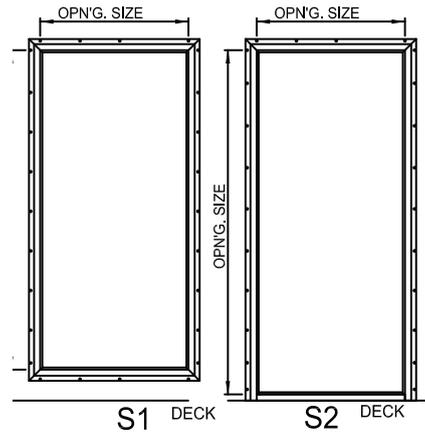

Frame Types

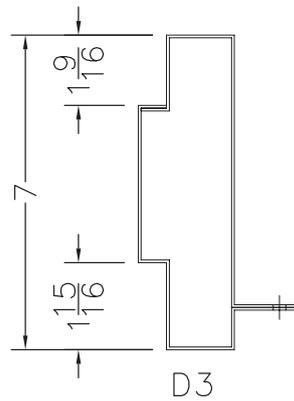

Door Handing Chart

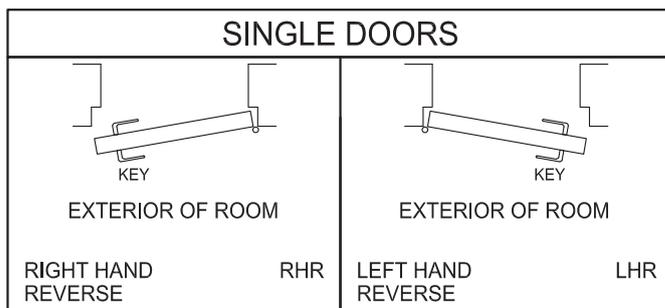

Weathertight Section

